P&M® automatic

MX1000

- Economical and reliable
- Easy installation
- High efficiency brushless DC24V, 60W motor
- Micro-processor controlled
- Multi-functional control module to integrate external modules such as :
  - Remote control , Direct input control, Safety Infrared photocell , Motion sensor and Key switch
- Low noise drive equipment

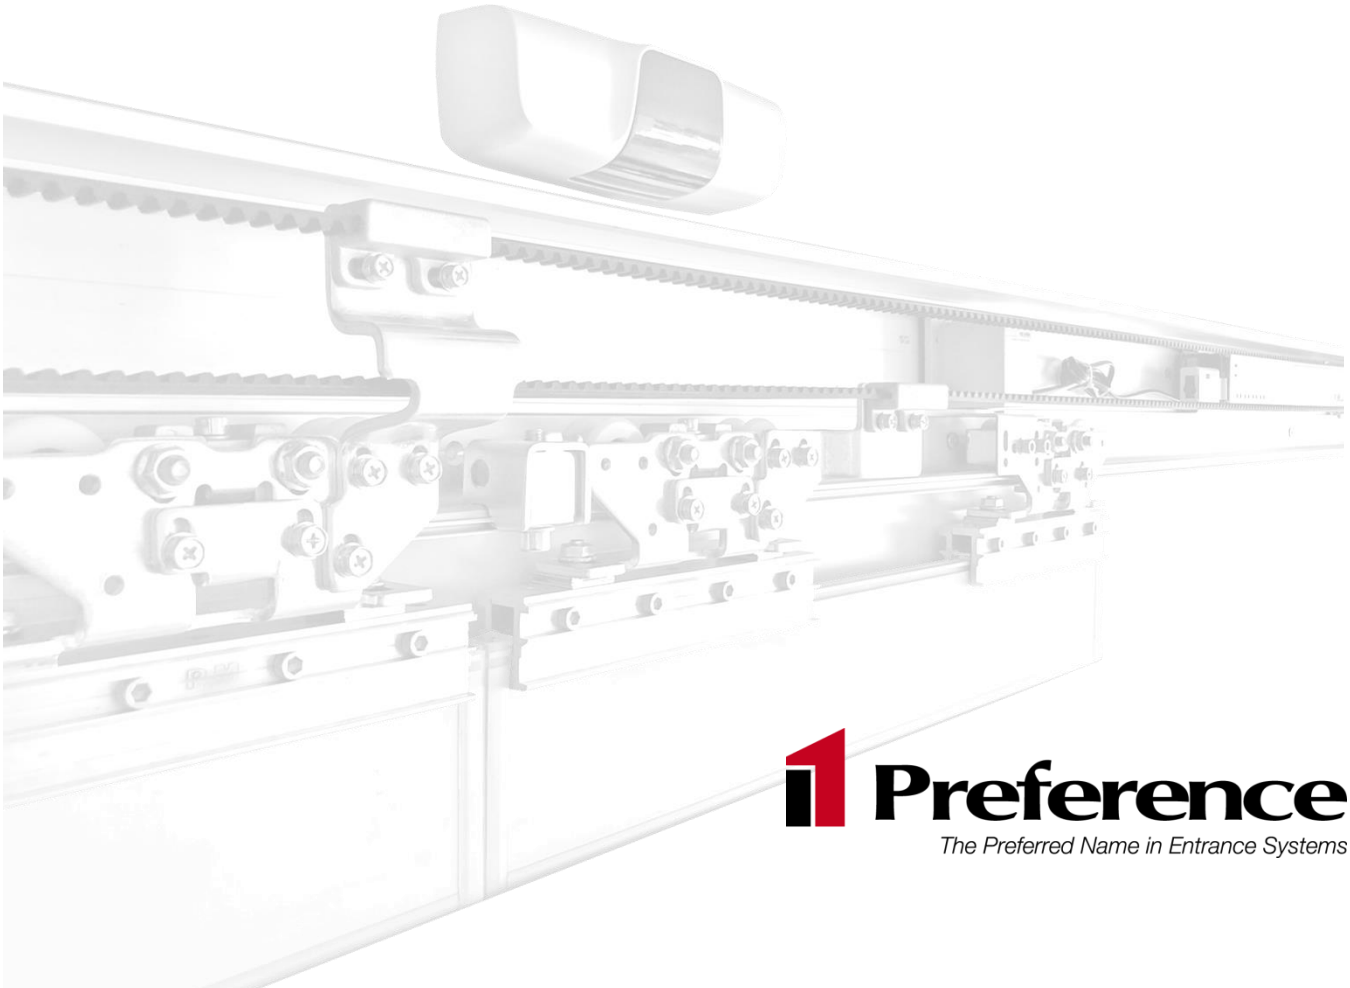

Preference

The Preferred Name in Entrance Systems

A sliding operating system that serves all applications ranging from commercial building entrances; shop fronts; hospitals and residential purposes. It has slim- line 125 Height aluminium profile track.

MX1000 is powered by a DC24V, 60W brushless motor and an intelligent micro-processor controller board that can be programmed for functional, safety and security parameters.

MX1000 has a connector board that allow integration of various external modules that allows user's intervention of the system.

COMPLTE SET PACKAGE

- ❑ MX-1011TR Main Aluminium Top Track
- ❑ MX-1012 Track Cover 2500mm
- ❑ MX-1013EC End Cap
- ❑ MX1000 Accessories Kit c/w:
  - MX-1001 Motor
  - MX-1002 Control unit
  - MX-1010 Motion sensor
  - MX-1014 Terminal switch
  - MX-1006 Pulley
  - MX-1004 Double carriage rollers
  - MX-1009 Belt connection bracket
  - MX-1007 Stopper
  - MX-1008 Toothed belt
- ❑ DRM38 Sliding door rail for 10 or 12mm thick glass
- ❑ UG-ALT4 Stainless Steel Single-U floor guide

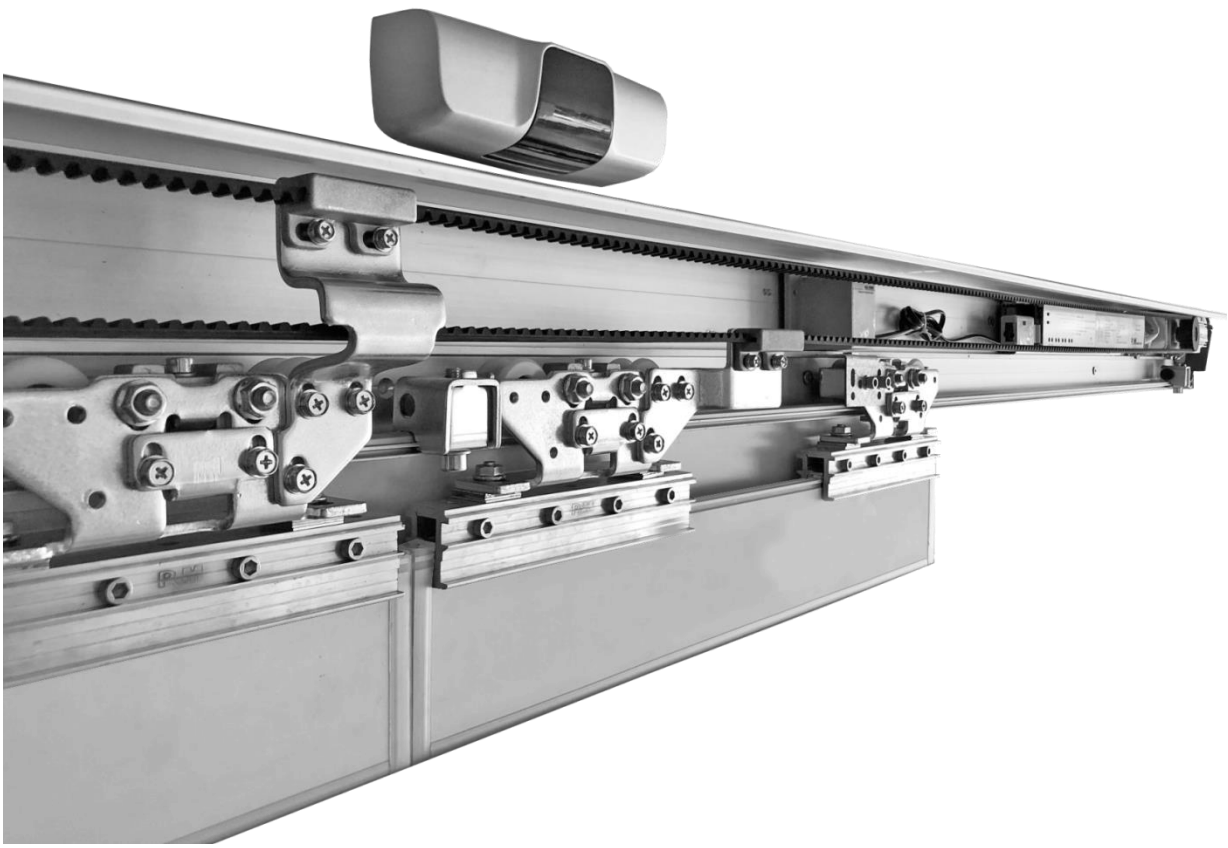

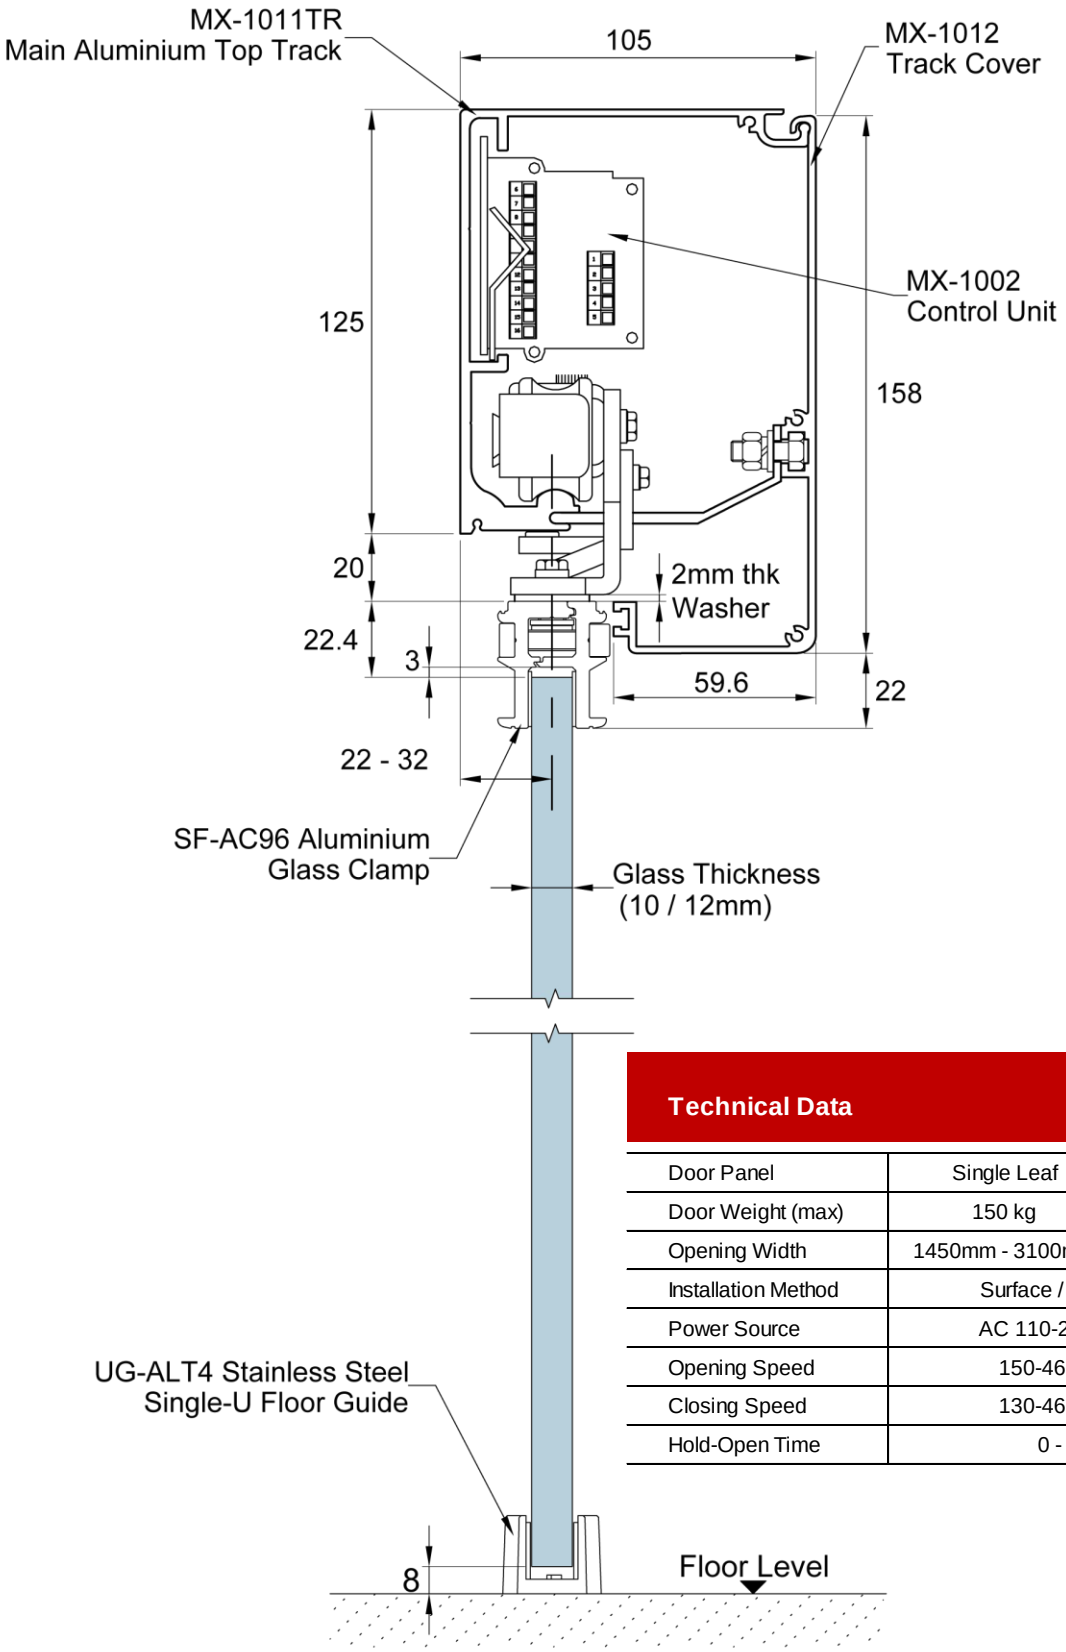

Technical Data

Door Panel	Single Leaf	Double Leaf
Door Weight (max)	150 kg	120 kg
Opening Width	1450mm - 3100mm	2500mm - 5000mm
Installation Method	Surface / Concealed Mounting	
Power Source	AC 110-220V ±10%, 50/60 Hz	
Opening Speed	150-460mm/s (adjustable)	
Closing Speed	130-460mm/s (adjustable)	
Hold-Open Time	0 - 8s (adjustable)	

Optional Accessories

MX-1540S	Safety Side Beam - c/w photo cell and control module	
MX-1560	5 Way Key Switch	
MX-1570	Wireless Touch Switch - c/w receiver and wireless touch swithless	
MX-1590	Electrical Drop Bolt Lock	
MX-1500	Backup Battery Pack	
MX-1420	RFID Access Control - c/w receiver card (1no)	
MX-1935	Push Button	
MX-1938	Remote Control - c/w transmitter and remote control module	
MX-1010	Motion Sensor	

Due to the company's policy of continuous product development and enhancement, the specifications and details contained in this brochure are subject to alteration without prior notice.

The dimensions, details, specifications and statements made herein or by our representatives arising out of any enquiries are given for information purposes only. They are not intended to have any legal effect and the company will not be bound thereby. The company will only accept obligations which are expressly negotiated for, and agreed and incorporated into written agreements made specifically with its respective customers.

Preference
Preference Pte Ltd

No.2 Kallang Pudding Road #01-02 Mactech Building Singapore 349307
Tel: (65) 6746 5185 Fax: (65) 6746 8749 Email: enquiry@preference.com.sg Website: www.preference.com.sg