GX 990
SERIES

Preference
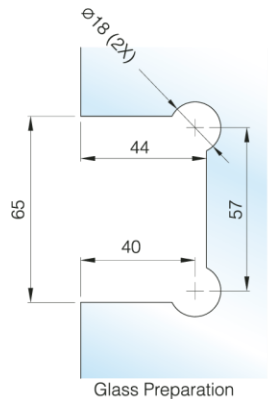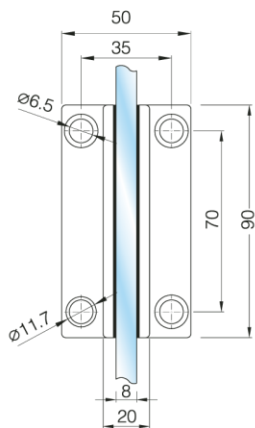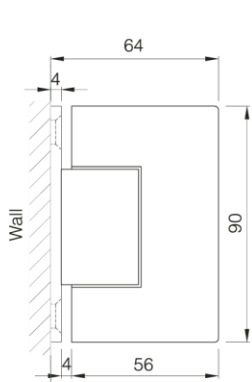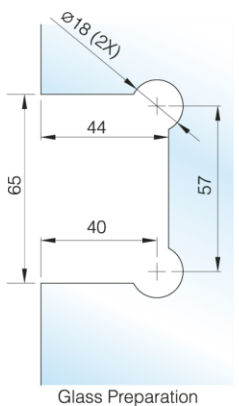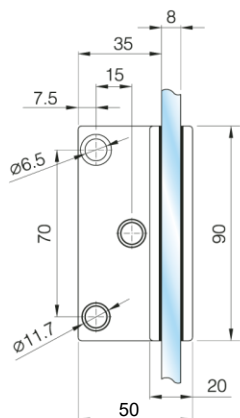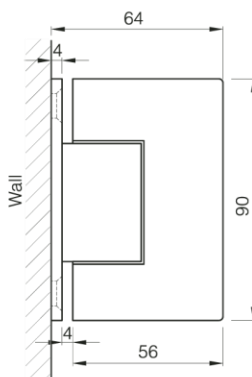*The Preferred Name in Entrance Systems*

GX990.1
Glass to Wall
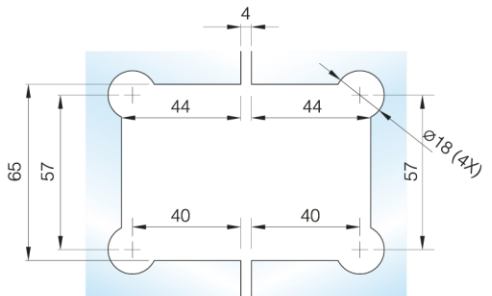Dimensions

GX990.1os
Glass to Wall
Dimensions

Wall

Glass Preparation

GX990.2
Glass to Glass (180°)
Dimensions

Fixed Panel   Door Panel

Glass Preparation

Fixed Panel   Door Panel
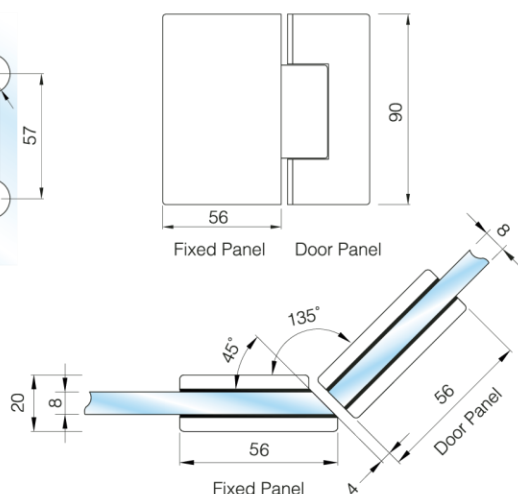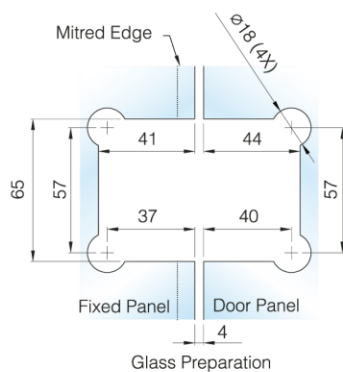
GX990.3
Glass to Glass (135°)
Dimensions

Mitred Edge   Ø18 (4X)

41   44
65   57   57
37   40

Fixed Panel   Door Panel

4

Glass Preparation

90

56

Fixed Panel   Door Panel

8

135°
45°
56
Door Panel

20   8
56
4
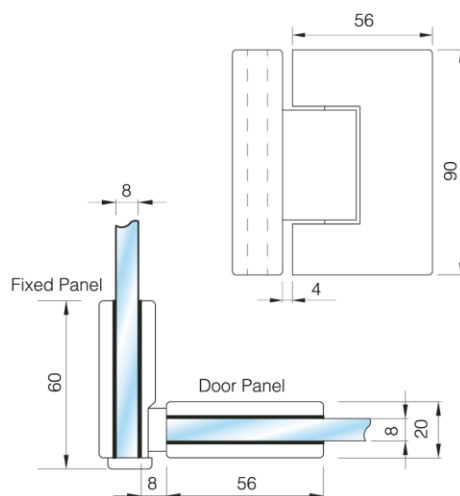
Fixed Panel

GX990.4
Glass to Glass (90°)
Dimensions

Ø18 (4X)

44   44
65   57   57
40   40

Fixed Panel   Door Panel

4

Glass Preparation

56

8
90
4

Fixed Panel

60

Door Panel

8   20

8   56
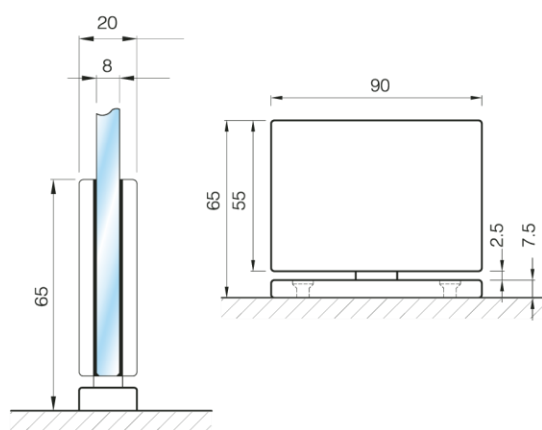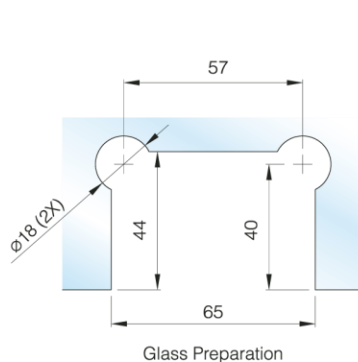
GX990.5
360° Floor Mounted Vertically Pivoted
Dimensions

57

Ø18 (2X)

44   40

65

Glass Preparation

20
8

65

65

90

65   55

2.5   7.5

GX990.6

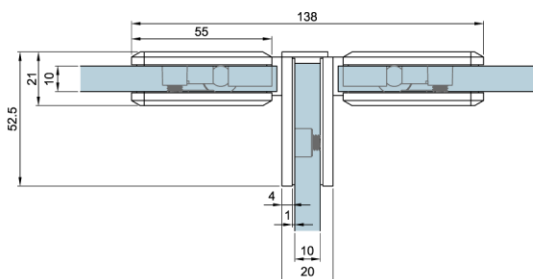**Double Shower Screen Door**

Glass Preparation
for Door Panel

Glass Preparation
for Fixed Panel

Door Panel   Door Panel

Fixed Panel

Door Panel

Fixed Panel

Door Panel
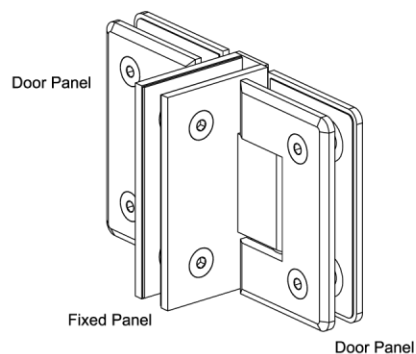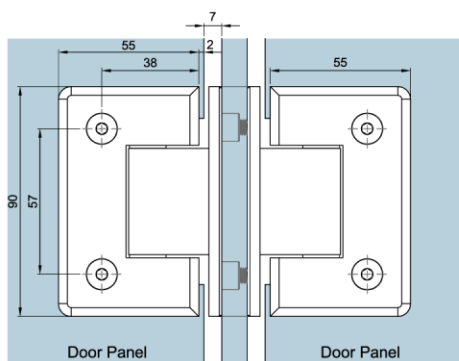
Applications

- Suitable for 8mm – 10m m thick glass panels
- Width of up to 750mm with a maximum weight of 45kgs per 2 hinges.
- Self-closing function approximately from 25°

Finishes

- Polish chrome plated
- Satin chrome plated
- Polish Stainless Steel
- Satin Stainless Steel
- Matt Black

Material

- Solid Brass
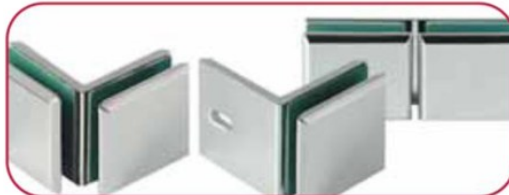- Stainless Steel

Test report

PSB Corporation, Singapore

- BS7352:1990 – Endurance Test (100,000 cycles)
- ASTM B117-03 - Salt Spray Test (240 hours @ 5±1% w/w NaCl)

Related products

Shower Connectors – Deane Series

Crossbar Connectors – Caprice Series

Vinyl Clip Seals – Gerda Series

Preference

The Preferred Name in Entrance Systems

Preference Pte Ltd